

509,301

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

Rec'd PCT/PTO 24 SEP 2004

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082685 A1

(51) International Patent Classification⁷: B65D 5/36, 19/40

(21) International Application Number: PCT/GB03/00996

(22) International Filing Date: 10 March 2003 (10.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0207049.8 26 March 2002 (26.03.2002) GB
0213178.7 8 June 2002 (08.06.2002) GB

(71) Applicants and

(72) Inventors: MULCAHY, Stephen [GB/GB]; New Inns Barn, Wilpshire Road, Rishton, Blackburn BB1 4AH (GB). REILLY, Ian [GB/GB]; 2 Durham Road, Widnes, Cheshire WA8 9UD (GB).

(74) Agent: ROYSTONS; Tower Building, Water Street, Liverpool L3 1BA (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN AND RELATING TO CORRUGATED CARDBOARD SUPPORTS

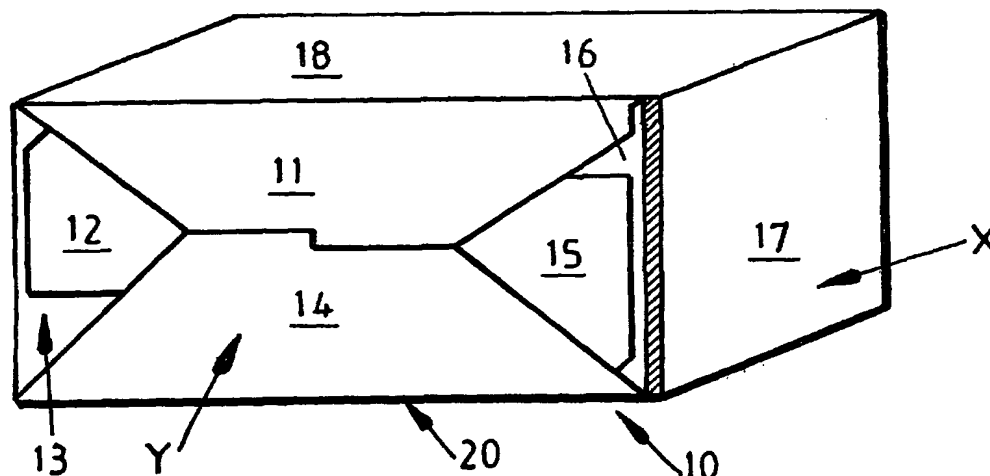

(57) Abstract: A corrugated support in the form of a double-blind box (10) comprising two substantially parallel opposing main body panels (18, 20) and two pairs of opposing side walls (X, Y) wherein each of one pair of opposing side walls (X) are formed from at least two interlocking parts (11, 22, 14, 25) to enable the support to be moveable from a collapsed state to an erect state. The support is formed from a blank.



WO 03/082685 A1